




Safety Technology International


European Office
Taylor House • 34 Sherwood Road • Bromsgrove
Worcestershire • B60 3DR • England
Tel: 44 (0) 1527 520 999 Fax: 44 (0) 1527 501 999
E-mail: info@sti-emea.com • Web: www.sti-emea.com

USA - Headquarters
2306 Airport Road • Waterford, Michigan 48327-1209
Phone: 248-673-9898 • Fax: 248-673-1246
Toll Free: 800-888-4784 • E-mail: info@sti-usa.com
Web: www.sti-usa.com

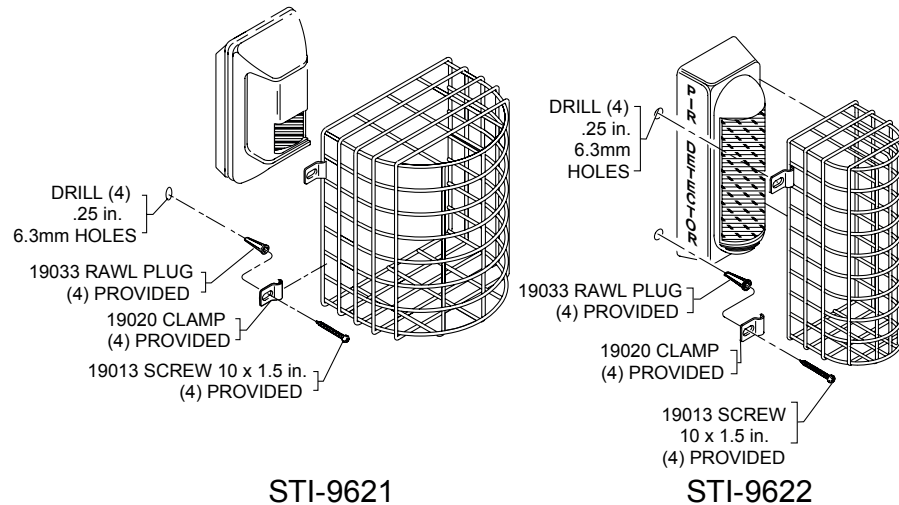

STI-9621

STI-9622

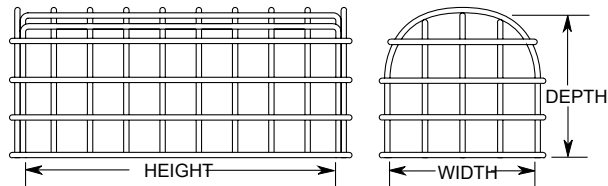

STI-9621/9622 SIDE VIEW STI-9621/9622 END VIEW

Model	Height	Width	Depth
STI-9621	178mm (7.0in.)	146mm (5.75in.)	114mm (4.5in.)
STI-9622	222mm (8.75in.)	102mm (4.0in.)	95mm (3.75in.)

INSTALLATION INSTRUCTIONS:

1. Center the wire guard over existing motion detector.
2. Mark and drill (4) mounting holes (see pictorial for size).
Lag Bolts - If lag shields and lag bolts are used, make sure rawl plug is flush with surface. Position guard, insert lag bolt and tighten. Length of bolt should be selected to assure full thread engagement in rawl plug.
3. For installations that require tamperproof fasteners, order KIT-81 stainless steel screws and part no. 19038 bit.

Three year warranty or a one year limited warranty (from date of purchase) on most products. See website for details. Electronic warranty form at www.sti-usa.com/wc14.

INSTALLATION OF STI-9621 & STI-9622 MOTION DETECTOR DAMAGE STOPPER

All specifications and information shown were current as of publication and are subject to change without notice.

9621UK FEB2017