




VANGUARD SITE

110V EMERGENCY BULKHEAD

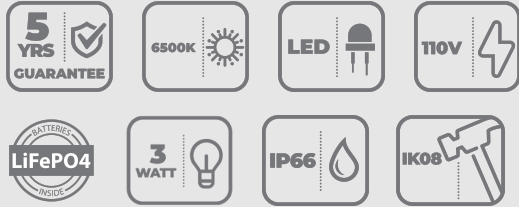

Vanguard Site delivers safe site illumination in the event of a power failure. Featuring a sleek, shallow profile and carefully designed lens for improved spacings, Vanguard Site also has configurable maintained or non maintained operation and features a hinged gear tray for easy and rapid installation.



Features

- Hinged gear tray for quick and easy installation
- Selectable maintained or non-maintained operation
- Supplied with self-adhesive legend kit (Also sold separately)

Code	Description	Lumen Output	Emergency Lumen Output	Wattage	Efficacy
VANS/3Y	Vanguard Site 110V 3W IP66 Maintained/Non-maintained Emergency Bulkhead	150 lm	150 lm	3W	-
VANS/3Y/ST	Vanguard Site 110V M/NM EM Bulkhead 3Hr IP66 Selectable ST/M	150 lm	150 lm	3W	-



VANGUARD SITE

110V EMERGENCY BULKHEAD

Specification

Material:-	Polycarbonate
Guarantee:-	5 Years
Colour Finish:-	Yellow
Colour Temperature:-	6500K
IK Rating:-	IK08






IP Rating:-	IP66
LED Lifetime:-	L70B50 54,000 Hours
Working Temperature:-	0°C to 45°C
Emergency Battery Type:-	LiFePO4
Electrical Class:-	Class II

Spacing Tables

Open Area					
Mount Height (m)	Open Area 0.5 Lux min (m)				
Self Contained	↔	↔↔	↔↔↔	↔↔↔↔	↔↔↔↔↔
2.5	4.3	10.6	2.5	6.7	
2.8	4.4	11.1	2.3	6.9	
3.0	4.5	11.6	2.3	7.0	
4.0	4.8	12.6	2.1	6.7	
5.0	4.9	13.4	1.0	6.4	

Escape Route			
Mount Height (m)	Escape Route 1 Lux min (m)		
Self Contained	↔	↔↔	↔↔↔
2.5	3.3	8.7	
2.8	3.3	8.89	
3.0	3.5	9.1	
4.0	-	-	

Dimensions

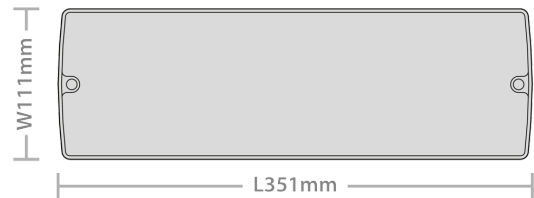

www.redarrowelectrical.co.uk