


DHI-HY-GC20D-R8

Wireless Interconnected Carbon Monoxide Alarm

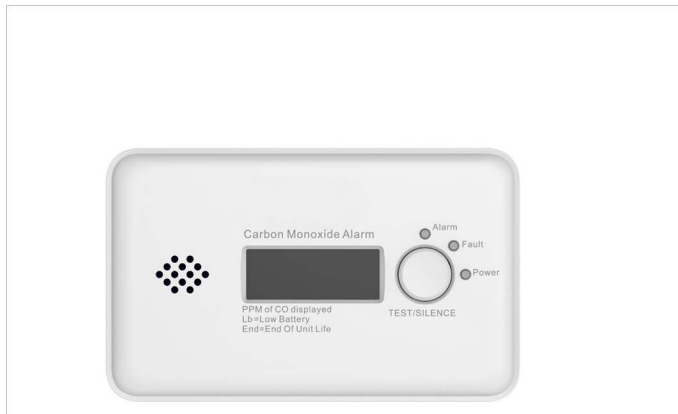

System Overview

Wireless Interconnected Carbon Monoxide Alarm is designed to continuously monitor carbon monoxide concentration. Adopting advanced electrical technology, a built-in high-volume buzzer, it responds quickly and becomes highly sensitive with stable performance and low false alarm. Once the surrounding CO concentration reaches the alarm value, it will promptly send out an audible and visual alarm signal to remind the user to take immediate measures. Moreover, the alarm signal will be pushed to every alarm in the interconnected network and they will raise the alarm in unison.

Scene

Application scenarios include homes, restaurants, hotels and other places that require carbon monoxide detection.

Technical Specification

Working Principle

Collection Type	Carbon Monoxide (CO)
Sensor Type	Electrochemical
Alarm	
Alarm Type	CO alarm, fault warning, low battery warning
Alarm Volume	Over 85dB (A) at 3 m (9.84 ft)
Alarm Mode	Visual and audible alarm
Silence Function	Support
Alarm Response Threshold	50 ppm: 60 min–90 min 100 ppm: 10 min–40 min 300 ppm: < 3 min

- High-performance electrochemical CO sensor to deliver accurate detection of carbon monoxide leakage and respond quickly
- Long standby time, low power consumption, 10-year battery life
- Three separate LED indicators to provide clear and apparent working status illustration
- Built-in high-volume buzzer with alarm volume 85dB (A) at 3 m (9.84 ft)
- Support low battery warning, one-click silence, and self-test
- Peak level display function to inform users extra potential hazards in home
- Informative and easy-to-read CO concentration display in screen
- Wireless interconnected with maximum of 24 devices
- End of life warning: LCD display shows End with the buzzer beeping and LED indicator flashing three times per minute

Technical Specification

Basic Parameters

Display	LCD
Indicator Light	LED (red/yellow/green)
LED Instruction	Alarm: Red indicator Fault: Yellow indicator Power: Green indicator
Operating Frequency	868MHz
Radio Signal Range	Up to 1000 m (3280.84 ft) in open air
Maximum Number of Interconnected Units	24pcs

Power Supply

Battery Life	10 years
Operating Voltage	3V CR123A lithium battery (non-replaceable)
Operating Current	Monitoring Current: $\leq 20\mu\text{A}$ Alarm Current: $\leq 20\text{mA}$

Operating Ambient

Operating Environment	Indoor use only
Operating Temperature	-10°C to $+55^{\circ}\text{C}$ ($+14^{\circ}\text{F}$ to $+131^{\circ}\text{F}$)
Operating Humidity	$\leq 95\%$ RH (non condensing)

Appearance

Color	White
Material	PC + ABS
Dimensions	116.4 mm \times 71.7 mm \times 29.1 mm (4.58" \times 2.82" \times 1.15")
Weight	125 g (0.28 lb)


Technical Specification

Installation	Wall Mount
Certification	
Certifications	TÜV and CE listed
Compliance Standard	EN 50291-1:2018

Ordering Information

Type	Part Number	Description
Carbon Monoxide Alarm	DHI-HY-GC20D-R8	Wireless Interconnected Carbon Monoxide Alarm

Dimensions (mm/inch)

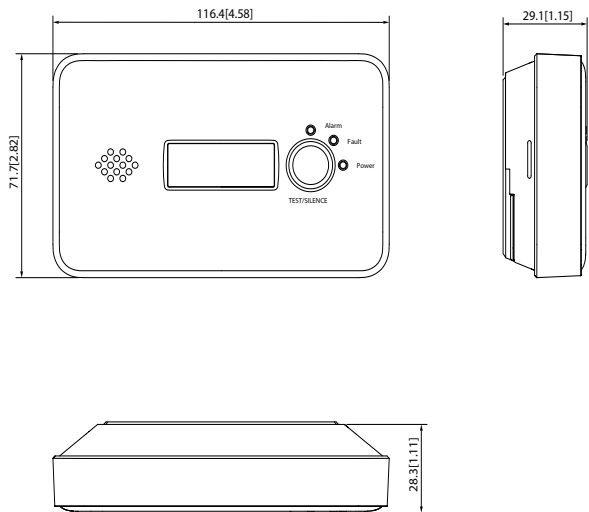

Installation

