

STELLAR

4CCT FIRE RATED DOWNLIGHT

Stellar is an ultra-slim downlight that delivers an extensive list of cutting edge features in one luminaire. Fire rated for both standard timber joist and I-joist ceiling construction, acoustic rated, with selectable 4.5/6W and 4CCT colour temperature which can be changed without removing from the ceiling. Stellar also has improved speed terminals and emergency loop. Available with 12 different interchangeable bezels.



Features

- 4CCT colour selectable - 2700 / 3000 / 4000 / 6000K, operated from below ceiling
- Fire rated for timber and I-joist construction
- Acoustic rating ISO10140 - 2:2010
- May be safely covered with thermal insulation
- Improved Speed Terminal Block & EM Loop



Specification

Code	Description	Lumen Output	Emergency Lumen Output	Wattage	Efficacy
SR/W	Stellar Fire Rated Downlight 4.5/6W 4CCT	585 775lm		4.5 6W	129 lm/W

Product Information

Warranty	5 Years
Colour Appearance (CCT)	2700K 3000K 4000K 6000K
IP Rating	IP65 (from below ceiling)
IK Rating	IK07
Voltage	230V
Material (Body/Housing)	Steel
Material (Diffuser/Cover)	Polycarbonate
Colour Rendition (CRI)	Ra >80

Colour Finish	White RAL9003
LED Life Expectancy	L70B50 50,000 Hours
Power Factor	>0.85
Frequency	50/60Hz
Driver Type	Dimmable
Approval	UKCA CE
Electrical Class	Class II
Working Temperature	-20°C to 40°C





STELLAR


4CCT FIRE RATED DOWNLIGHT

Packaging Information

Dimensions (mm)	Ø: 86 x D: 36 mm
Product Net Weight (kg)	0.203 kg
Barcode	5055807623728
Box Dimensions (mm)	L:90 x W: 90 x D: 81 mm
Box Gross Weight (kg)	0.25 kg

Units/Outer Carton	48
Outer Carton Barcode	15055807623725
Outer Carton Dimensions (mm)	L: 385 x W: 385 x D: 355 mm
Outer Carton Gross Weight (kg)	12.28 kg

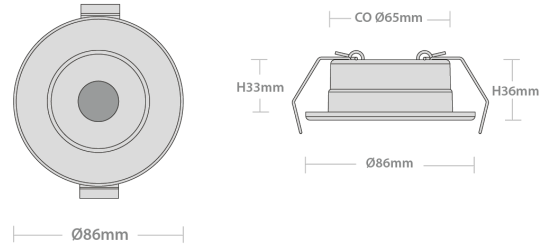

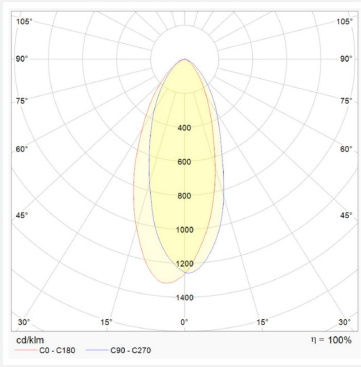

ENERGY

Red Arrow
SR/W

A
B
C
D
E
F
G

E

6
kWh/1000h

5001 941 11002