


APOLLO

4CCT, WATTAGE SELECTABLE, IP65, PLUG & PLAY BULKHEAD

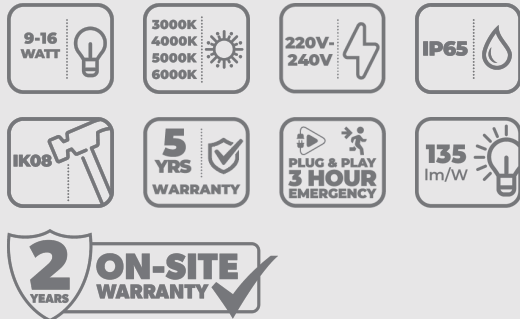

Apollo bulkhead offers both economy and efficacy all in one! Featuring high efficiency of 135lm/W, Selectable Power 9/12/16W, 4CCT & Plug & play Emergency kit and Microwave sensor with corridor function. Apollo is suitable for indoor or outdoor applications with premium design features such as: matt textured bezel, opal diffuser, IP65 rating, side conduit entry and hinged gear tray with optional black, black eyelid and Chrome bezels.

Features

- Efficacy of 135lm/W
- Selectable Power 9/12/16W
- Selectable 4 CCT 3/4/5/6K
- Plug & Play emergency and microwave sensors
- Matt textured bezel (Black, Black eyelid & Chrome optional)
- IP65 / IK08 rating
- Hinged Gear Tray
- Side conduit entry
- Single or Contractor Pack (4pcs)



Code	Description	Lumen Output	Emergency Lumen Output	Wattage	Efficacy
APOL16W-CCT	Apollo Bulkhead Wht 9/12/16W 4CCT 3/4/5/6K	1250lm 1620lm 2200lm	-	9W 12W 16W	135 lm/w
APOL16W/4PK-CCT	Apollo Bulkhead Wht 4pc Contractor Pack 9/12/16W 4CCT 3/4/5/6K	1250lm 1620lm 2200lm	-	9W 12W 16W	135 lm/w



APOLLO

4CCT, WATTAGE SELECTABLE, IP65, PLUG & PLAY BULKHEAD

Specification



Material:-	Polycarbonate
Warranty:-	5 Years
Colour Finish:-	White RAL9003
Colour Temperature:-	3000K 4000K 5000K 6000K
IK Rating:-	IK08
IP Rating:-	IP65
LED Lifetime:-	L80B10 113,000 Hours

CRI:-	Ra >80
Working Temperature:-	-20°C to 45°C
Electrical Class:-	Class II
Power Factor:-	0.9
Wattage:-	9W 12W 16W
Voltage:-	220-240v
Spec:-	Please see individual SKU datasheets for more Specification information

Maximum Fitting Per Circuit

Automatic Circuit Breaker Type:	B6	B10	B13	B16	B20	C10	C13	C16	C20
Rated Current:	6A	10A	13A	16A	20A	10A	13A	16A	20A
Cable (mm):	1.5	1.5	1.5	2.5	2.5	1.5	1.5	2.5	2.5
APOL16W/4PK-CCT	4	7	9	12	14	12	15	20	23

Dimensions

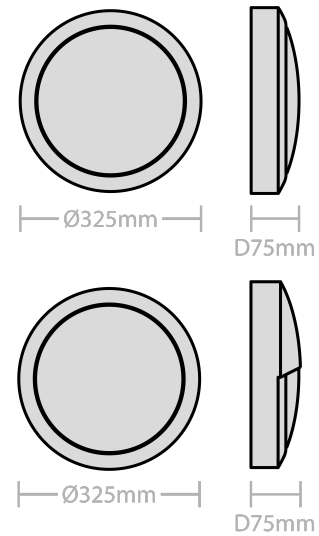

www.redarrowelectrical.co.uk