

# Datasheet



- Split-spectrum sensor technology
- Test and hush features in one single button
- Loud sound output over 85 dB(A) at 3 meters
- Low quiescent current consumption
- Surface-mount device (SMD) circuit board design
- Low battery warning signal



## System Overview

Standalone Smoke Alarm (hereinafter referred to as the device) is designed to continuously monitor smoke concentration. Adopting new split-spectrum sensor and a built-in high-volume buzzer, it responds quickly and becomes highly sensitive with stable performance and low false alarm. Once the surrounding smoke concentration reaches the alarm value, it will promptly send out visual and audible alarm signal to remind the user to take immediate measures.

## Scene

The device can be widely used in residential areas such as villas, apartments and dorms, including reading rooms, living rooms, bedrooms and hallways.

## Technical Specification

### Working Principle

Collection Type	Smoke
Sampling Period	9 s
Sensor Type	Photoelectric

### Alarm

Alarm Type	Smoke alarm, fault alarm, low battery warning
Alarm Volume	85dB (A) at 3 m (9.84 ft)
Alarm Mode	Visual and audible alarm
Silencing Function	Yes
Alarm Response Threshold	0.2dB/m-0.3dB/m

## Technical Specification

### Basic Parameters

Indicator Light	Alarm, fault and operation indicator
Led Instructions	Standby: Green indicator flashes once per minute Alarm: Red indicator flashes once per second Fault: Red indicator flashes once per minute Low battery warning: Red indicator flashes once per minute
Coverage Area	When the height of the space is less than 8 m (3.28 ft), the protection area of a device is 20 m <sup>2</sup> -40 m <sup>2</sup>

### Power Supply

Battery Life	10 year
Power Source	3V CR123A lithium battery (replaceable)
Operating Current	Monitoring current: ≤ 15uA Alarm current: ≤ 35mA

### Operating Ambient

Operating Environment	Indoor
Operating Temperature	-10°C to +55°C (+14°F to +131°F)
Operating Humidity	≤ 95% RH (non condensing)

### Appearance

Color	White
Casing	ABS
Dimensions	φ98 mm × H43.1 mm (φ3.85" × H1.70")
Weight	136 g (0.30 lb)
Installation	Ceiling Mount

## Technical Specification

Certification

Certifications

TÜV and CE listed


Compliance Standard

EN 14604:2005+AC:2008

## Ordering Information

Type	Part Number	Description
Smoke Alarm	DHI-HY-SA20A	Standalone Smoke Alarm

## Installation

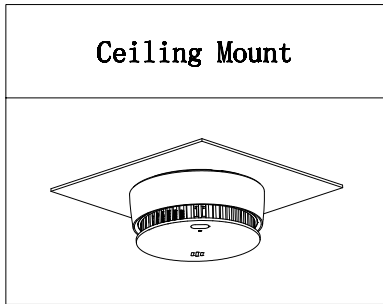

## Dimensions (mm/inch)

